

RCBO-accessories, series BOLF



BM900001

Schrack-Info

- Indication of contact-position
- Snap on mounting

Auxiliary contacts




BM900001

Schrack-Info


- Auxiliary contacts for RCBO series BOLF

	B-HSI - BM900001	B-HR - BM900022
Contacts	1 NO + 1 NC	2 CO
Standard:	IEC/EN 62019	
Mounting	snap on left side	
Rated operation voltage U_i :	250 V AC	
Minimum operating voltage per contact U_{min} :	5 V AC/DC	
Minimum operating current I_{min} :	10 mA AC/DC	
Rated current I_n :	6A	4A
Conditional rated short circuit current I_k :	1kA with BMS0-H	
Utilisation category AC 15:	2A / 250V-AC	
Utilisation category AC 13:	3A / 250V-AC	
Utilisation category DC 12:	0,5A / 110V-DC	
Max back up fuse for short circuit protection:	6A gG/gL or BMS0-H	
Terminal:	0,5–2,5 mm ²	

BM900001

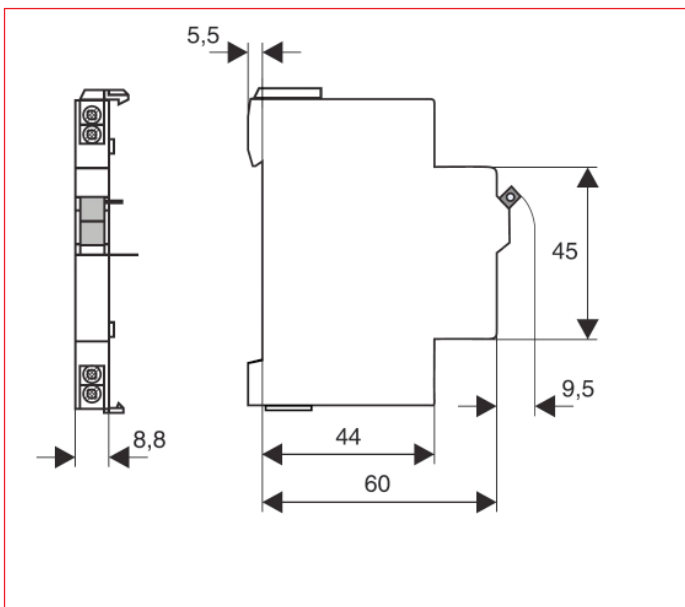

BM900022

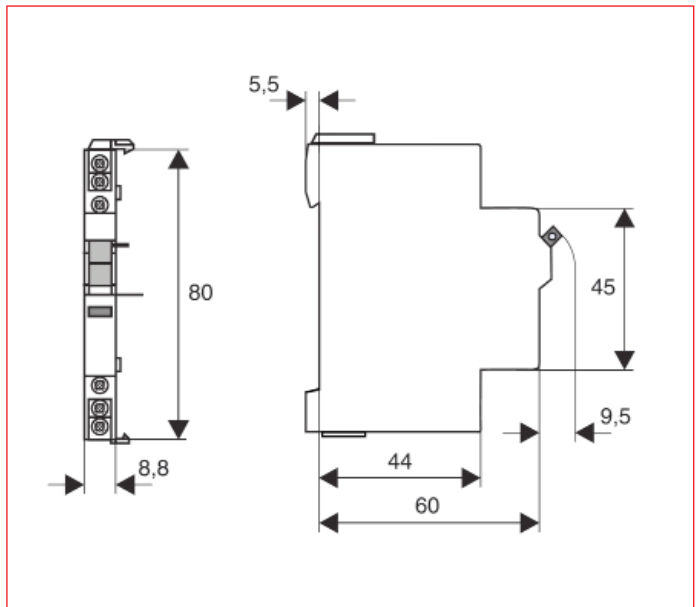

DESCRIPTION	AVAILABLE	ORDER NO.
Auxiliary Contact, 1 NO + 1 NC, snap-on-version		BM900001
Auxiliary Contact, 2 CO switchable, snap-on-version		BM900022