

Current-Transformers, Split Version



MG967150

Schrack-Info

- Current transformer for easy mounting in an existing low-voltage system


Technical Data

Primary current:	100 A, 150 A, 250 A, 400 A, 600 A
Secondary current:	5A
Nominal voltage:	0,72 kV
Frequency:	50-60 Hz
Test voltage:	3 kV for 1 minute (at 50 Hz)
Thermal class:	A
Thermal short-circuit current (I_{th}):	60 I_n
Dynamic limiting current (I_{dyn}):	2,5 I_{th}
Overcurrent limiting factor:	FS 5
Housing:	self-extinguishing plastic
Mounting:	Screw fastening

Rated Burden

Primary current	Class 0.5	Class 1	Class 3
100 A	-	-	3 VA
150 A	-	-	3,75 VA
250 A	-	3,75 VA	5 VA
400 A	2,5 VA	3,75 VA	7,5 VA
600 A	5 VA	7,5 VA	20VA

Dimensions

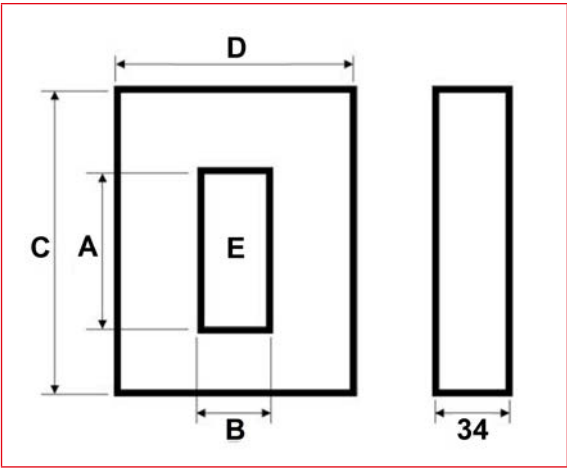

Key

Type	A	B	C	D	E
100A	32 mm	22 mm	106 mm	90 mm	30 x 20 mm
150A	32 mm	22 mm	106 mm	90 mm	30 x 20 mm
250A	32 mm	22 mm	106 mm	90 mm	30 x 20 mm
400A	62 mm	32 mm	136 mm	100 mm	60 x 30 mm
600A	62 mm	32 mm	136 mm	100 mm	60 x 30 mm

DESCRIPTION	AVAILABLE	ORDER NO.
100/5A		MG967100
150/5A		MG967150
250/5A		MG967250
400/5A		MG968400
600/5A		MG968600



Order no. blue: on stock, usually ready for delivery on the day of order